Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

CUST. NAME	N0037	DATE	JUN.06,02'
DESCRIPTION	Toroidal Coil Inductors	TYPE	
GS PART NO.	GSTCV6852A-451K	DWG. NO.	015505
CUST. PART NO.	542-5705	CUST. DWG. NO.	

DIM	Unit in mm
A	22.22(max)
B	11.09(max)
C	15.0±1.0
D	0.65±0.05
E	
F	
G	
H	
I	
J	
K	
L	
M	
N	

MECHANICAL MEASUREMENTS

Jameco Part Number 208291

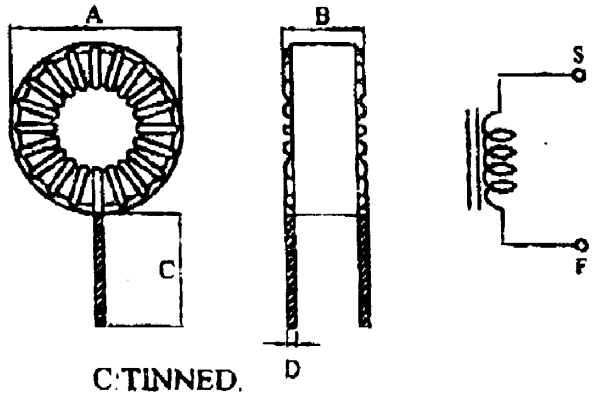

C:TINNED.

ELECTRICAL MEASUREMENTS & TEST EQUIPMENT

NO.	L (uH) @1KHz/0.25V	L (uH) +IDC @1KHz/0.25V	SRF(min) MHz	RDC(max) (Ω)	IDC(max) (A)
EQU.	CH-101	CH-101 CH 1320	HM 9460	HP34401A	CH 1320
SPE.	450±10%	250.0(min)		0.145	1.5
1	452.3	301.6		0.119	
2	454.3	300.5		0.118	
3	453.5	299.8		0.118	
4	454.0	293.7		0.119	
5	452.9	303.2		0.119	
6					
7					
8					
9					
10					

Remark :

CT39(OR EQUI.)
CORE: T68-52A
WIRE: 0.65 ϕ 2UEW NY'
TURN: 89Ts(IN,REF.)
耐熱膠布：6mmx140mm.
※ VARNISH.

DRAW BY: 6/7/02

CHECKED BY: 6/7/02

APPROVED BY: 6/7/02